



PT-E550WVP

Create durable labels for electrical or datacom installations, via the easy-to-use built-in labelling functions, PC software or from your smartphone or tablet with the Brother cable labelling app.



Key Features:



Large backlit graphic display



Advanced cutter (including half cutter) for easy-to-peel labels



Includes 1 tape cassettes, AC adapter, Li-ion battery, USB cable, hand strap and carry case



Prints 3.5, 6, 9, 12, 18 and 24mm labels and heat shrink tube

Brother TZe laminated labels - designed to last

Brother P-touch laminated TZe tapes consist of seven layers of materials, resulting in a thin, extremely strong label. Characters are formed with a thermal transfer ink and sandwiched between two protective layers of PET (polyester film). The result is a virtually indestructible label that can withstand even the harshest conditions.



Resistant











Resistant






Chemical Easy Peel Fade Resistant Resistant

Laminated T

Water Resistant

Packed with features

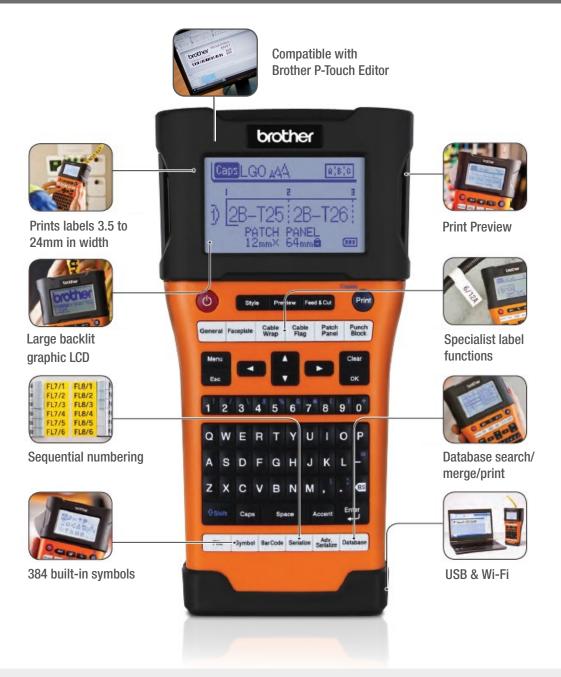

Brother iLink&Label App

Connects project data in Fluke Networks
LinkwareTM Live with Brother PT-E550WVP
Labelling Tool to dramatically simplify and
streamline cable label printing. The industry's first
and only jobsite workflow solution for printing
labels virtually from a tester. Eliminates duplicate
data entry into both devices, helps reduce human
input errors, and makes labelling large data
centres faster and easier than ever.

For more information, contact the Brother Commercial Team on:

corporatesales@brother.com.au corpsolutions.brother.com.au



download cable identifiers

to smartphone, then to your Brother PT-E550WVP device.

	Technical Specifications for the PT-E550WVP
Hardware	
Display Type	16 characters x 3 lines backlit graphic LCD with print preview
Interfaces	USB 2.0, Wi-Fi, Wireless Direct
Print Speed	30mm / second (maximum)
Maximum Tape Width	24mm
Maximum Print Height	18mm
Cutter Type	Automatic (Full & Half)
Battery Type	BA-E001 Li-ion rechargeable battery (supplied), 6 x AA alkaline/rechargeable batteries (LR6/HR6 - not supplied
	Label Creation
Dedicated Labelling Functions	General, Faceplate, Patch panel, Punch block, Cable wrap, Cable flag, Heat shrink tube Serialise (automatic number incrementation)
Fonts	14 fonts; 10 styles; 6-48 point size
Max. Lines per Label	7 (on 24mm width tape cassette)
Max. text blocks	99
Symbols	384
Frames	7
Barcodes	9 protocols
Automatic numbering	1-99
Copy Printing	1-99
Vertical Text Printing	Yes
Rotated text printing	Rotate once, Rotate and repeat
	Memory
Maximum Characters per Label	1,500
Label Memory Locations	99
	PC Software Main Features
Supported Operating Systems	Windows Vista®, Windows® 7, 8, 10 / Mac OS X 10.6 or greater
Cable Labelling Wizard	Yes
Font Faces	All installed true-type fonts
Font Styles	12
Image Import	JPG, BMP, TIFF and other popular types
Screen Capture	Yes
Frames	153
Barcodes	21 protocols including 1D/2D barcodes
	Carton Contents
Includes	PT-E550WVP, 12mm black on white Flexible ID tape (8m), Li-ion rechargeable battery, AC adapter, Label desi software and printer driver, CD-ROM, USB cable, wrist strap, user guide and carry case
	Supplies
TZe Tape Cassette Widths	3.5mm, 6mm, 9mm, 12mm, 18mm, and 24mm
HSe Tube Cassette Widths	5.8mm, 8.8mm, 11.7mm, 17.7mm, and 23.6mm
	Optional Accessories
Batteries	BA-E001 Li-ion rechargeable battery AA alkaline/rechargeable batteries (LR6/HR6)
AC Adapter	AD-E001 AC adapter
	Weight and dimensions
Size	126mm (W) x 250mm (H) x 94mm (D)
Weight	1.05kg



















brotheraustralia



Brother International Australia



BrotherAU





At Brother, our green initiative is simple. We strive to take responsibility, act respectfully and try to make a positive difference to help build a society where sustainable development can be achieved. We call this approach Brother Earth.



